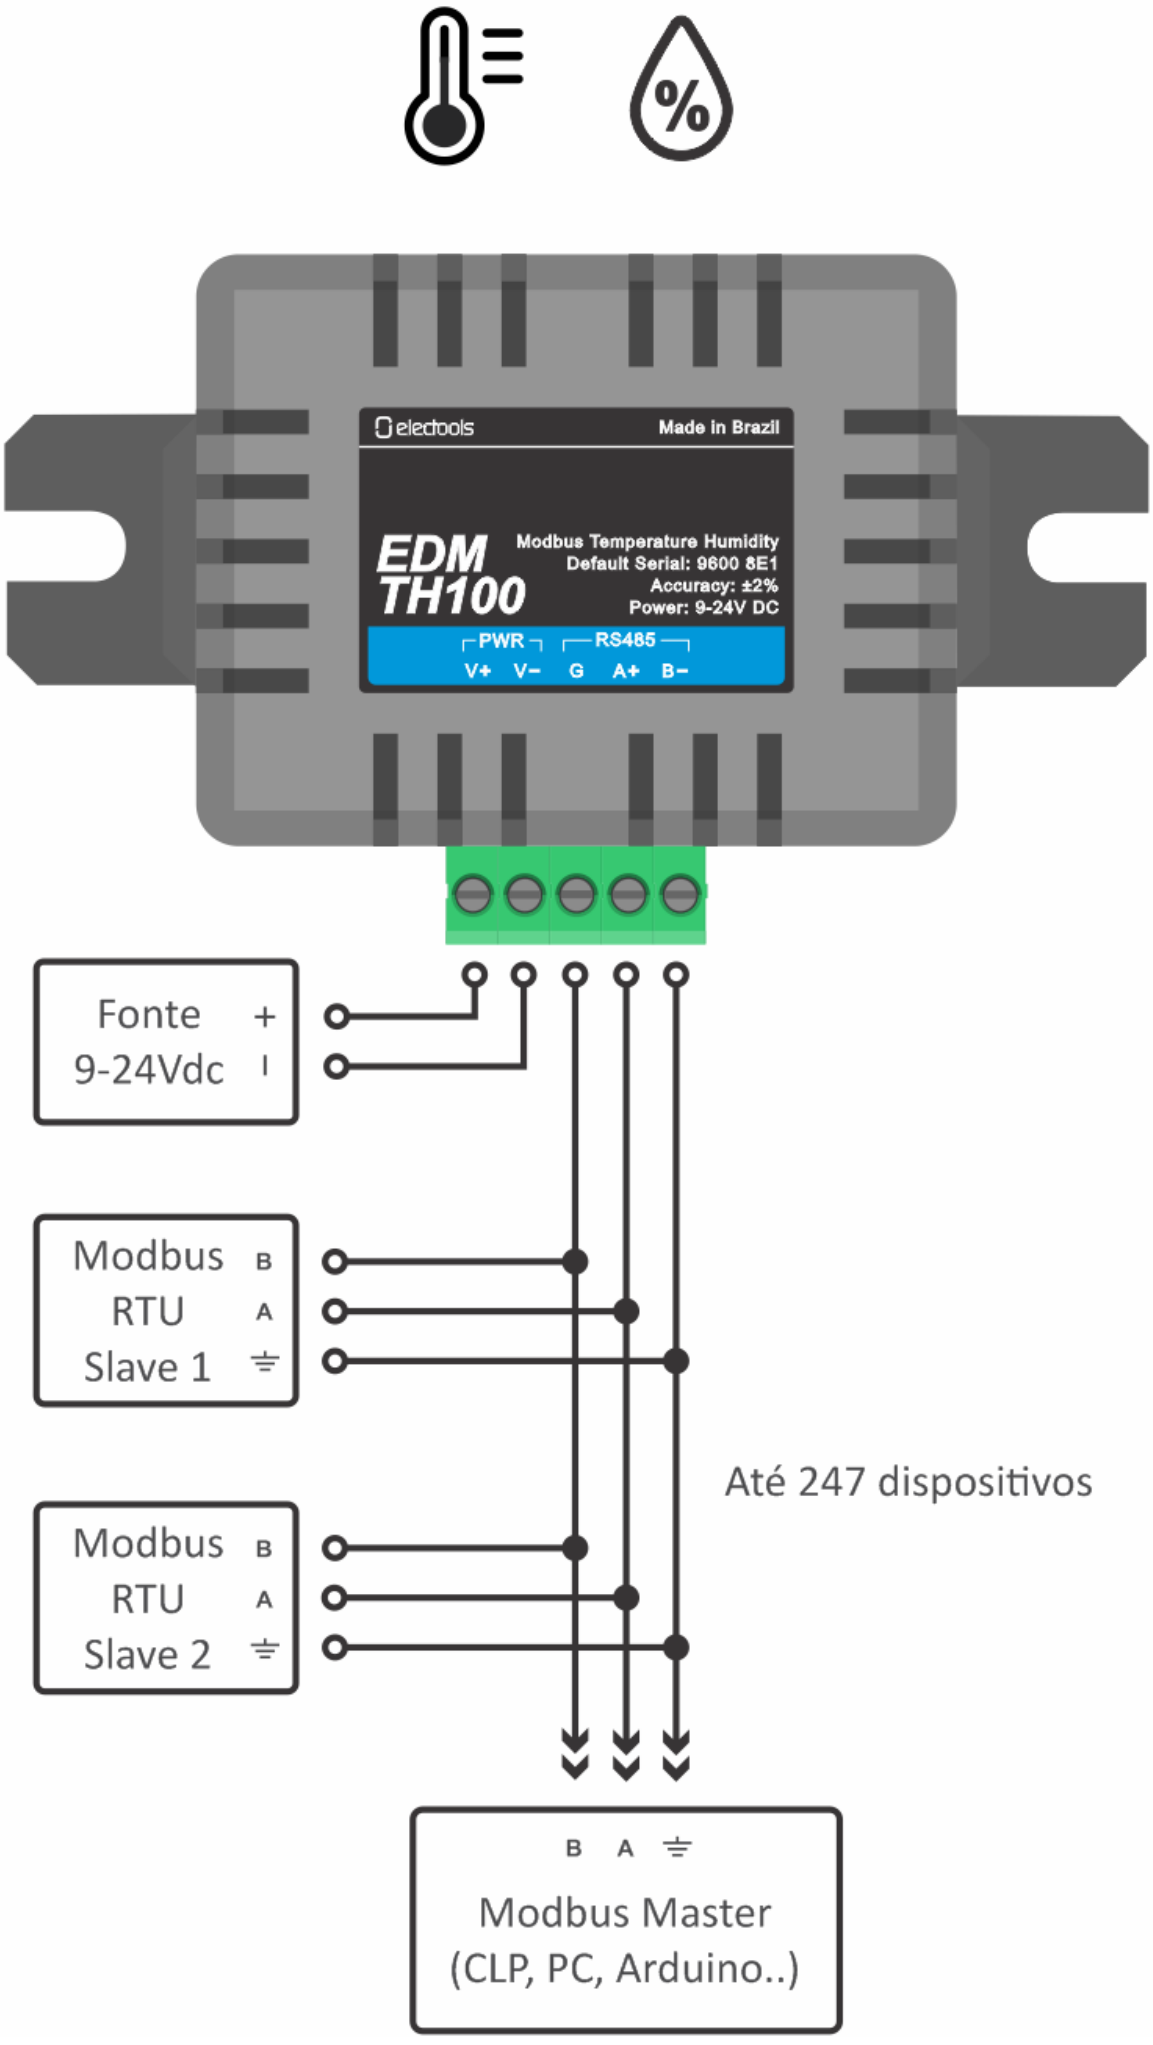
4.3. Diagrama de conexão


electools
Made in Brazil
EDM
TH100
Modbus Temperature Humidity
Default Serial: 9600 8E1
Accuracy: ±2%
Power: 9-24V DC
PWR
RS485
V+ V- G A+ B-
Fonte
9-24Vdc
+
-
Modbus
RTU
Slave 1
B
A
Modbus
RTU
Slave 2
B
A
Até 247 dispositivos
B A
Modbus Master
(CLP, PC, Arduino..)

Revision #2
Created 25 July 2022 15:54:25 by Electools
Updated 12 February 2023 02:04:34 by Electools